

WS 1000CT Water Cooler

-  Innovative design & technology
-  Stainless steel reservoirs
-  Industry-leading 5-year warranty
-  Enhanced alkalinity*
-  State-of-the-art filtration and sanitization*
-  Nutrient boost from added minerals*
-  Built-in leak detection system
-  Clean, fresh tasting water



1-800-875-2222
www.wellsys.com



Certified by IAPMO R&T according to NSF/ANSI 372 for material safety.

WS 1000CT Water Cooler

- ✿ Fits perfectly under most kitchen cabinets while offering a large dispensing area
- ✿ Stainless steel reservoirs
- ✿ Safety button for hot water dispensing
- ✿ Hot and cold water
- ✿ One-hand dispensing
- ✿ Continuous sanitization*
- ✿ Enhanced alkalinity and nutrient boost from added minerals*
- ✿ Self-contained, full-sized filter housing

* When used with Wellsys proprietary filtration




SPECIFICATIONS

DESCRIPTION	1000CT UNIT SPECIFICATIONS	FILTER BANK SPECIFICATIONS
Weight	49 lbs	9.05 lbs
Dimensions	18" h x 12" w x 16" d	15.5" h x 4" w x 14.5" d
Colors	Black	
Cold Tank Capacity	1 gallon (3.8 liters)	
Hot Tank Capacity	0.33 gallons (1.3 liters)	
Dispense Height	8" h	
Recommended Water Pressure	60-70 psi	
Rated Voltage/Frequency	110v/60Hz @ 4.9 amps	
Power Consumption	1.05 kWh/24 hours	

Manufactured in Korea



Multi-Stage Purification Process

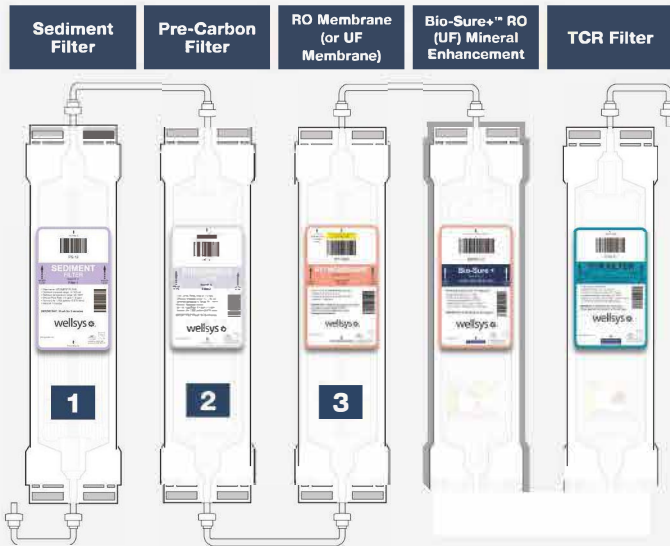

Description	Service Life	Service Flow Rate	Optimum Pressure	Dimensions
Sediment Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
Pre-Carbon Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
Reverse Osmosis (RO) Membrane (or UF)	N/A	N/A	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	13.5" L x 2.5" D
Bio-Sure+™ Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
TCR Filter	1,500 Gallons (5,678 L)	0.60 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D



Certified by IAPMO R&T according to NSF/ANSI 372 for material safety.